

F2H-FTB-4-A


4 Cores Fiber Optic Terminal Box (Max Capacity: 4 cores SC)




Description

- Water-proof design with IP65 Protection level
- Integrated with splice cassette and cable management system
- Manage fibers in a reasonable fiber radius condition
- Easy to maintain and extend the capacity
- Fiber bend radius control more than 40mm
- Suitable for the fusion splice or mechanical splice
- 4 ports cable entrance for FTTH drop cable

Model	Description	Size	Max Capacity			Size
		A*B*C(mm)	SC	LC	PLC	D*E (mm)
F2H-FTB-4-A	Distribution Box	191*120*44	4	8	8 (LC)	185*93

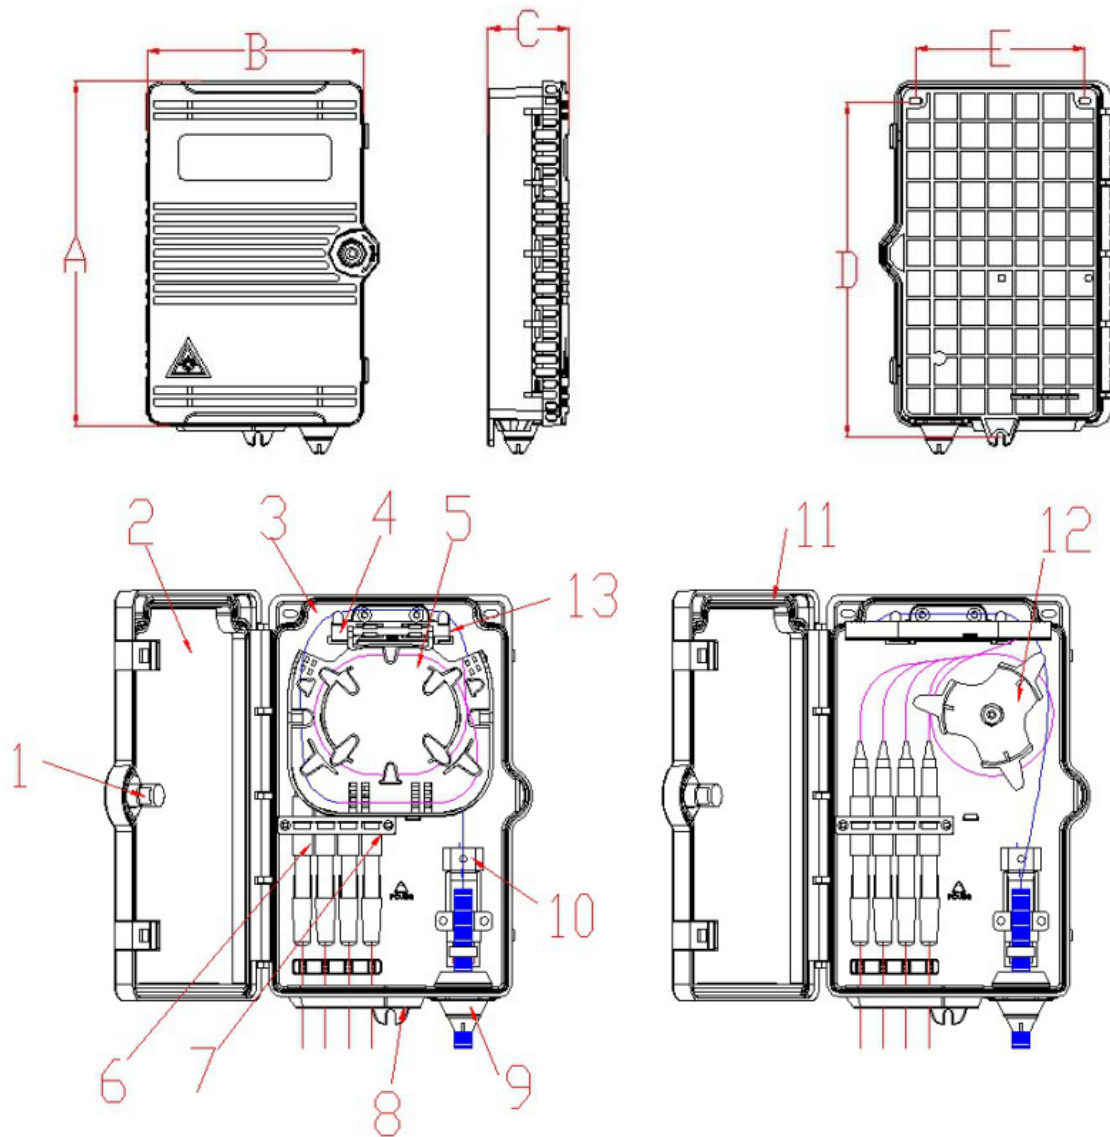

- 1.Lock ; 2.Lid ; 3.Base; 4.Flapon bracket ; 5.Flapon plate ; 6. Adaptor ; 7. Adaptor holder ;
 8.Outlet gluing ; 9.Block connector ; 10. Main cable strengthen mound layer; 11. Seal gasket
 ; 12. Fiber coiling column; 13.PLC Mounting position

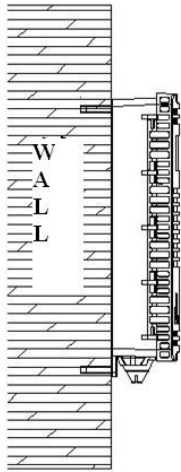

Installation

Drill 4 holes over the wall based on the size above,
place the expansion bolt $\Phi 7.5 \times 40$,
place the box to match up the holes and use bolt to fasten